


Quick start guide



1

Tighten the turnbuckle with your hands to create tension.

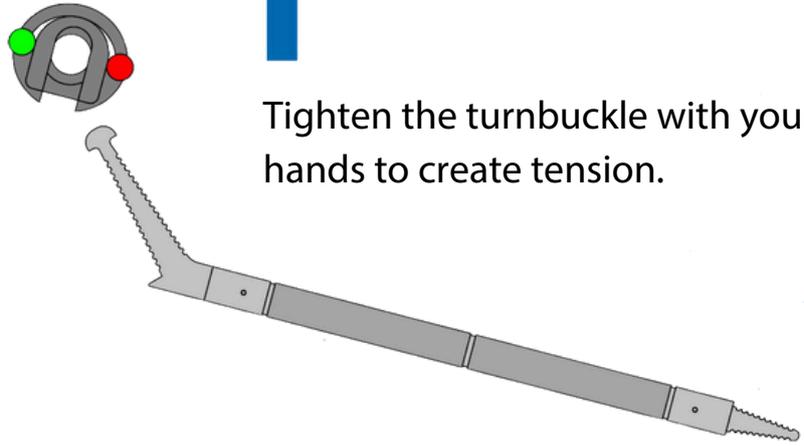


2

Insert the headpiece of the lashing tool into the middle gap of the turnbuckle.

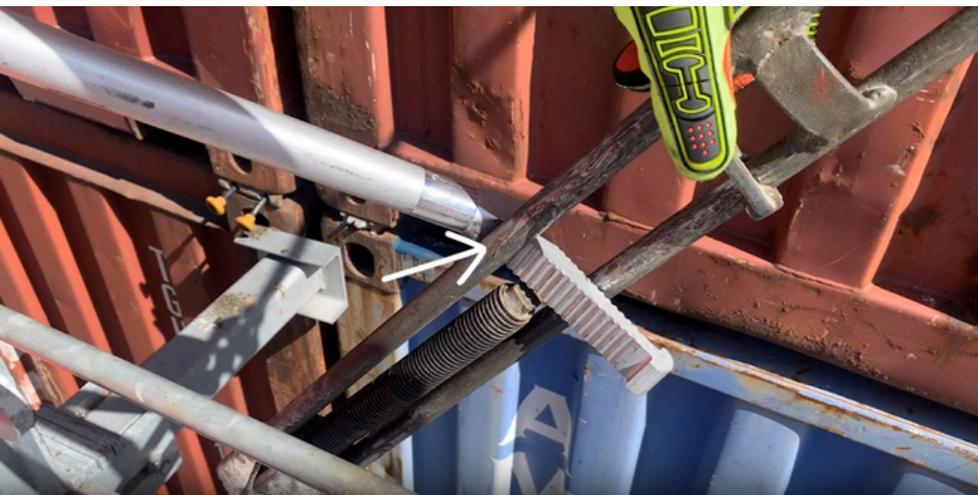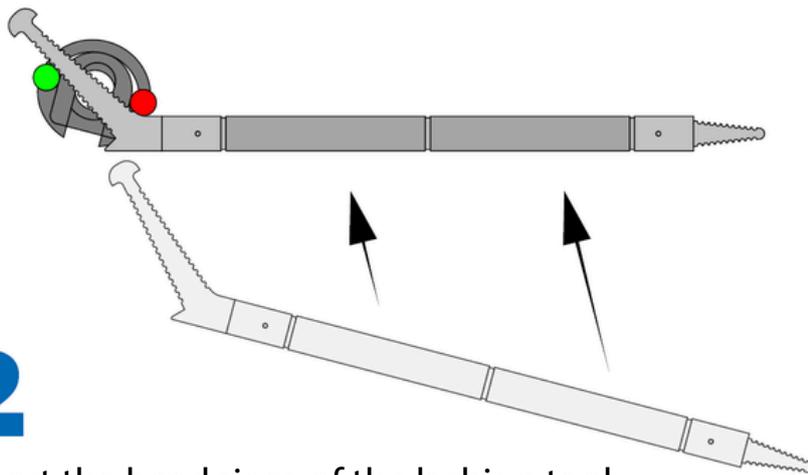


3

Rotate the lashing tool over a 90° angle.

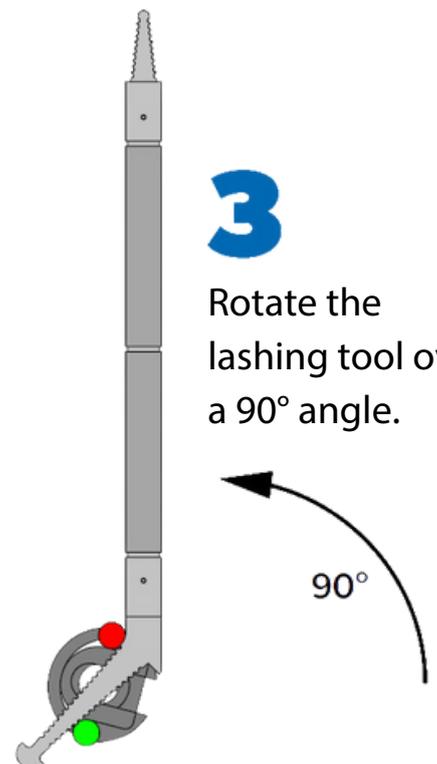


4

Hold the headpiece in the middle gap of the turnbuckle, and now rotate the lashing tool a half turn (180°).

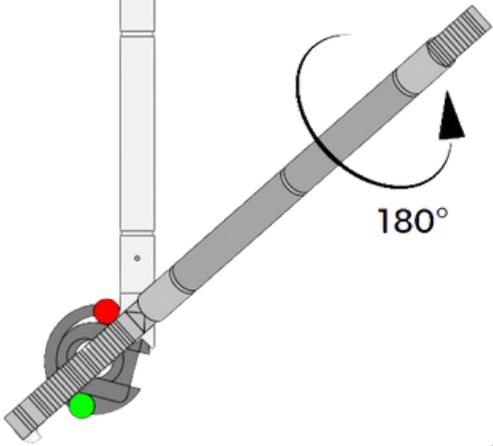

5


Find grip with the support anchor and the push and pull surface on the turnbuckle.

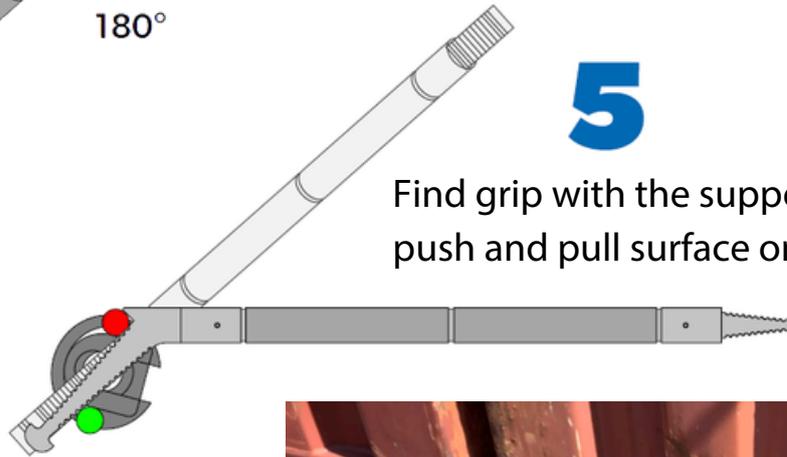

Corner of the support anchor against the metal bar.

6

Turn the lashing tool again over a 90° angle and rotate again in the same direction as before.

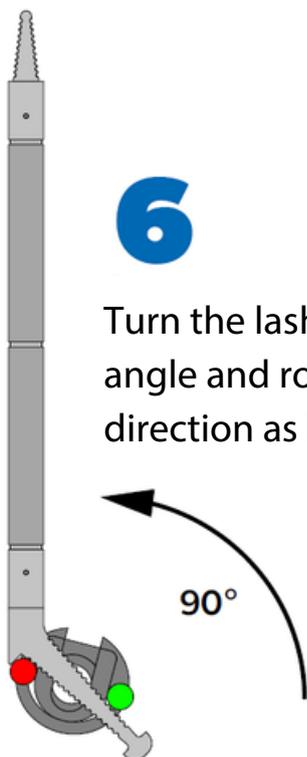

7

Repeat until the turnbuckle is completely secure or loose.